


Stand-Alone / Wiegand Proximity Readers

PR-3123-PQ *Mullion Size*


PR-3125-PQ *Standard Size*

Features:


- 1,000 Users (up to 998 users and 2 duress users)
- 9~24 VDC Operation with low current draw – 90mA max.
- Form C relay output – 2A@12VDC
- Adjustable output time – 0.5~99s, or toggle
- Built-in tamper alarm and external alarm output
- Multicolor status LED
- EEPROM Memory protects programmed information in case of power loss
- Includes remote programmer
- Egress input lets users exit the premises without using a card
- Can serve as either Wiegand reader or controller, both output and input are selectable from 26~37 bits
- Uses EM 125kHz cards – 10 User cards included
- 2-Door interlock
- Extreme cold tolerance to -40° F (-40° C)
- Epoxy-filled ABS plastic housing, outdoor rated – IP66
- Easy duplication of users to additional devices

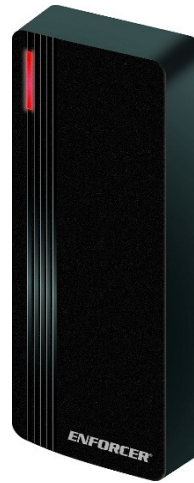

PR-3123-PQ

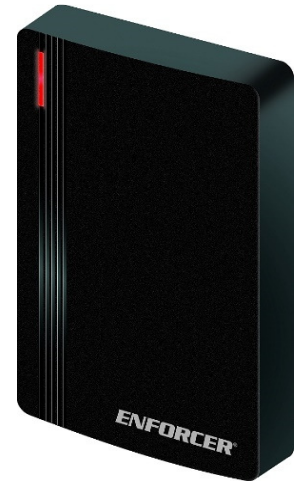


PR-3125-PQ



Specifications:

Model	PR-3123-PQ	PR-3125-PQ
Operating voltage	9~24 VDC	
Current draw	Standby	30mA@12VDC
	Active	90mA@12VDC (max.)
Outputs	Form C	NO/NC/C, 2A@12VDC
	Alarm	Transistor ground, 2.5A@12VDC
	Wiegand	26~37 bits
Inputs	Wiegand	26~37 bits, PIN input – 4, 8, or 10 bits
	Egress	N.O. Ground
	Door sensor	N.C. Ground
Card type	125kHz EM	
Operating temperature	-40°~140° F (-40°~60° C)	
Dimensions	17/8"x43/4"x13/16" (48x120x20 mm)	215/16"x43/4"x13/16" (75x120x20 mm)
Weight	4.4-oz (125g)	6.4-oz (185g)

Dimensions:

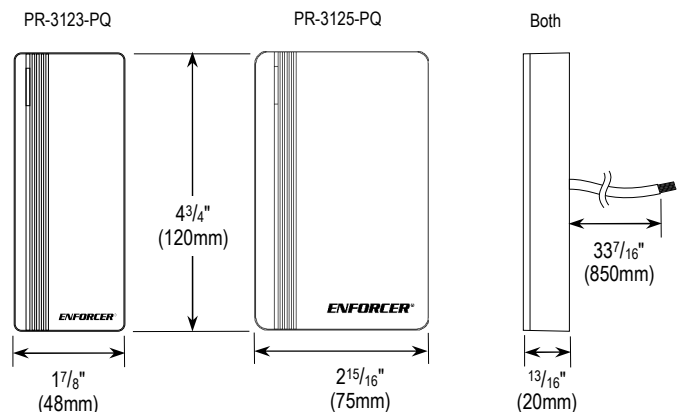

Superior Electronics Corporation

No.10, Lane 31, Chongde St., Sinyi District, Taipei City 110, Taiwan

Tel:886-2-2378-6161 • Fax:886-2-2378-6163

E-mail: info@superior-elec.com • Website: www.enforcer.com.tw



Copyright © 2019 Superior Electronics Corporation. All rights reserved.
All trademarks are the property of Superior Electronics Corporation or their respective owners.
Superior Electronics Corporation's policy is one of continual development. For that reason, we reserve the right to change prices and specifications without notice. Superior Electronics Corporation is not responsible for misprints.

ENFORCER® SECO-LARM® CRIMEBUSTER® CBA® SLI®

PI_PR-312x-PQ_SEC_191115.docx